

X20X1 TC-K
X20X1/JB TC-K


POLYESTER BOXES TYPE X20X1, X20X1/JB		
Type of protection	type X20X1: ⊕ II 2G Ex eb IIC T6 Gb ⊕ II 2D Ex tb IIIC T85°C Db	type X20X1/JB: ⊕ II 2G Ex ia IIC T6 Gb ⊕ II 2D Ex ia IIIC T85°C Db
Ingress protection	IP 66	
Ambient temperature	-20 °C ≤ Ta ≤ +40 °C	
Rated voltage	55 V	Ui = 55 V
Rated current	1 A	
Dimensions (w × h × d)	122 × 120 × 90 mm	
Mounting holes / spacings	4 × ø6,6 / 106 × 82 mm	

Terminals – screw	Cable glands	Weight	Order number
2 pcs Ni/Cr 2 × 2.5 mm ² grey (thermocouples) 1 pc 2 × 2.5 mm ² grey (FE)	1 pc M20 (ø7 – ø12) mm 2 pcs M12 (ø4 – ø6.5) 1 pc plug M12 (loose part)	0,9 kg	X20X1 TC/K


Terminals – screw	Cable glands – blue	Weight	Order number
2 pcs Ni/Cr 2 × 2.5 mm ² grey (thermocouples) 1 pc 2 × 2.5 mm ² grey (FE)	1 pc M20 (ø7 – ø12) mm 2 pcs M12 (ø4 – ø6.5) 1 pc plug M12 (loose part)	0,9 kg	X20X1/JB TC/K

Other variants to order.

Detailed technical data on demand – e-mail: obchod@generi.cz



X12X1 XCW01

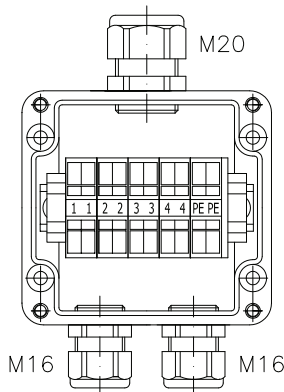

X12X1 XCW02

POLYESTER BOXES TYPE X12X1	
Type of protection	⊕ II 2G Ex eb IIC T6 Gb ⊕ II 2D Ex tb IIIC T85°C Db
Ingress protection	IP 66
Ambient temperature	-35 °C ≤ Ta ≤ +40 °C
Rated voltage	550 V
Rated loading	1,5 mm ² : 13 A; 2,5 mm ² : 16 A
Dimensions (w × h × d)	80 × 75 × 55 mm
Mounting holes / spacings	4 × ø5 / 68 × 45 mm

Terminals – spring-cage	Cable glands	Weight	Order number
4 pcs 2 × 2.5 mm ² grey 1 pc 4 × 2.5 mm ² g/y (PE)	1 pc M20 (ø7 – ø12) mm 1 pc M16 (ø5 – ø8) mm	0,3 kg	X12X1 XCW01
4 pcs 4 × 2.5 mm ² grey 1 pc 4 × 2.5 mm ² g/y (PE)	1 pc M20 (ø7 – ø12) mm 2 pcs M16 (ø5 – ø8) mm	0,4 kg	X12X1 XCW02

Other variants to order.

Detailed technical data on demand – e-mail: obchod@generi.cz